SE Range
- Super Extinguishers

	Max. rescue height	Max. safe operating load	Water capacity	Integrated powder line
F 32 SE	32 m	500 kg	6000 l/min	9 kg/sec.
F 42 SE	42 m	500 kg	6000 l/min	9 kg/sec.
F 53 SE	53 m	500 kg	6000 l/min	9 kg/sec.

WFT Range
- Water and Foam Towers

	Max. operating height	Water capacity	Integrated powder line
F 17 CTL	17 m	4000 l/min	9 kg/sec.
F 21 WFT	21 m	4000 l/min	9 kg/sec.
F 30 WFT	30 m	6000 l/min	9 kg/sec.
F 42 WFT	42 m	6000 l/min	9 kg/sec.
F 53 WFT	53 m	6000 l/min	9 kg/sec.

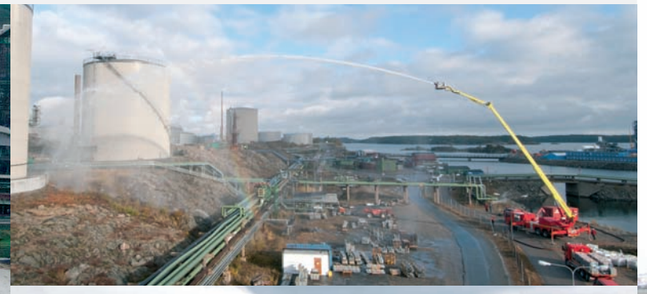

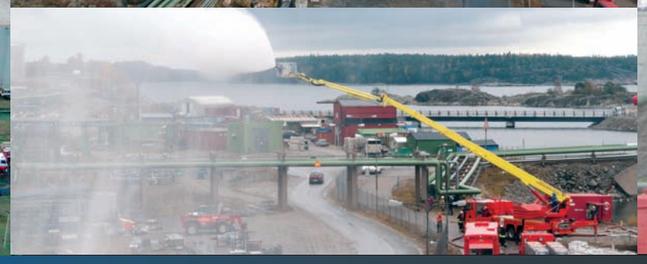

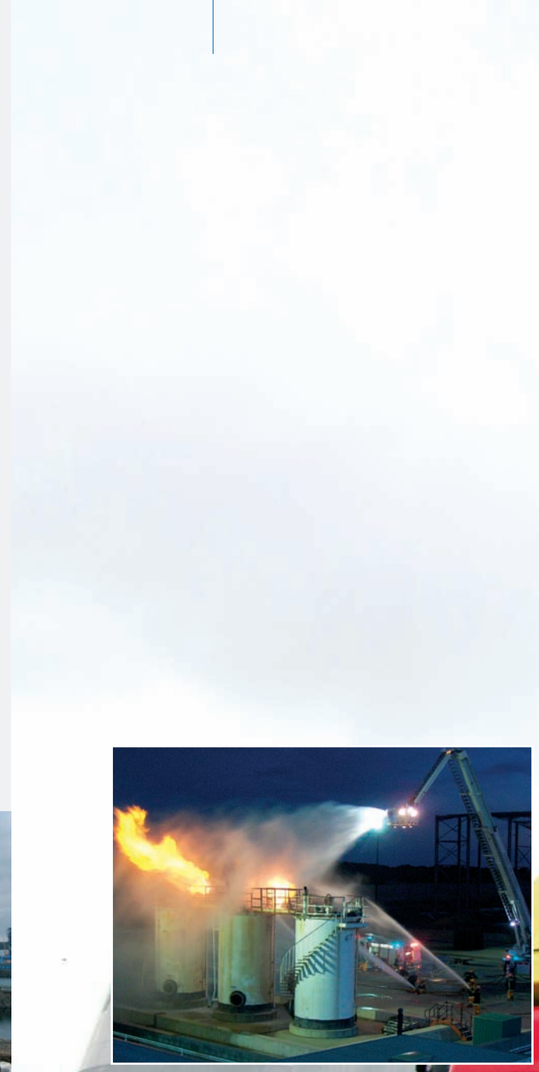

INDUSTRIAL FIRE applications

INDUSTRIAL FIRE

ISO 9001 ISO 14001 EN-ISO 3834-2
DNV CERTIFIED ORGANISATION
IPAF

BRONTO SKYLIFT OY AB
Teerivuorenkatu 28
FI-33300 TAMPERE
Finland
Tel +358 20 7927 111
Fax +358 20 7927 300
www.bronto.fi

BRONTO SKYLIFT AB
Okvistavägen 38
SE-18640 VALLENTUNA
Sweden
Tel +46 8 5816 6040
Fax +46 8 5816 6035
www.bronto.se

BRONTO SKYLIFT AG
Ifangstrasse 111
CH-8153 RÜMLANG
Switzerland
Tel +41 44 818 8040
Fax +41 44 818 8050
www.bronto.ch

BRONTO SKYLIFT GMBH
Sinkenbreite 8
DE-89180 BERGHÜLEN
Germany
Tel +49 7344 92 499 0
Fax +49 7344 92 499 50
www.bronto-skylift.de

A subsidiary of Federal Signal Corporation

Bronto Skylift - Above All

Above all

INDUSTRIAL FIRE APPLICATIONS

Bronto Skylift has created a wide range of vehicles for industrial fire brigades. A special dry powder system with supply up to 53 m can be integrated in the machine, providing a powder output of 9 kg per second. With the radio remote control the machine can be operated from a safe distance if necessary. Both stainless steel and non-metallic tanks are available. A various foam mixing systems are available for the units. Extended surveillance capability available by remote controlled camera.

SE Range Super Extinguishers - for multipurpose industrial operations

Bronto Skylift Super Extinguishers are specially designed for the needs of industrial fire brigades. Multipurpose SE range has rescue platform with maximum safe load up to 500 kg. The Super Extinguishers have a water discharge capacity of up to 6000 l/min with water and foam tanks. Reliable and versatile aerial rescue platforms with increased horizontal outreach and extensive up-and-over reach suit perfectly for industrial surroundings: refineries, industrial and chemical plants etc. The unit can be effictively used also as maintenance platform and light tower.

WFT Range Water and Foam Towers

Bronto Skylift Water and Foam Towers are ideal for extinguishing targets that are difficult to reach, for cooling tanks under a fire hazard etc.
One of the main advantages of Bronto Skylift WFT units is the flexibility of the basic configuration. It can be adapted for various bodywork designs and specifications, allowing an optimal combination of the desired features: the alternative operating heights from 17 to 53 m with large extinguishing capacity. Water/foam tanks and other required optionals are available.

OPERATING HEIGHTS FROM 17 TO 53 METERS

Unmatched extinguishing capability